





## HIGH EFFICIENCY ROAD LIGHTING FIXTURE GL-ZD03

Fixture sizes (Unit: Inch/mm)

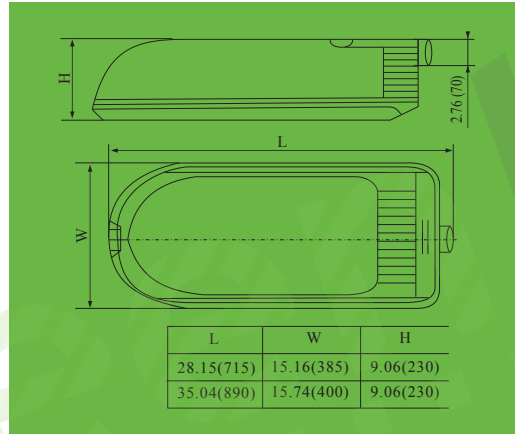

Distribution curve flux

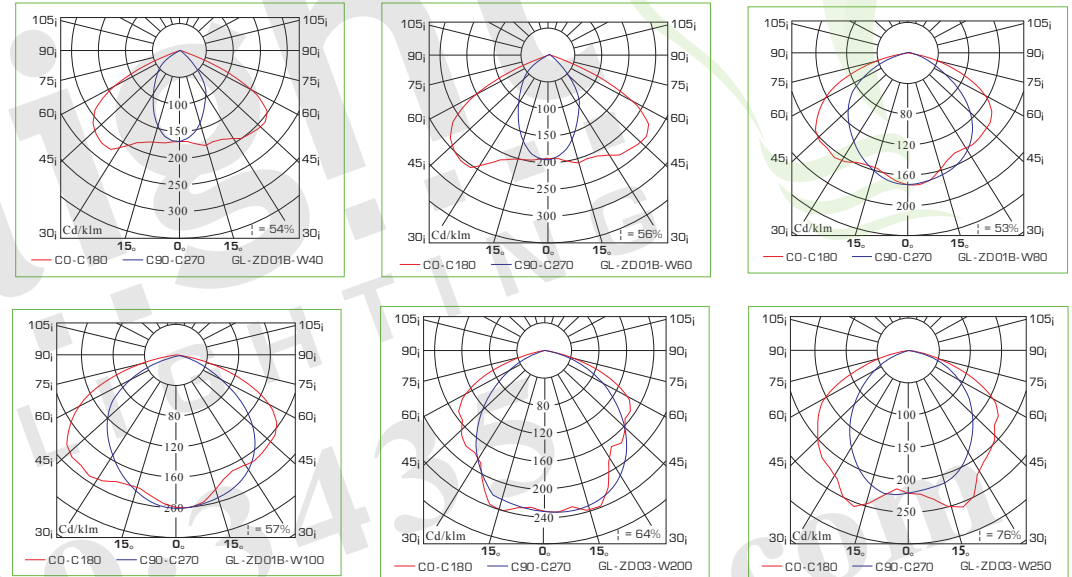

### Features

1. High-pressure die cast aluminum housing with powder coated finish for corrosion resistance
2. High purity vacuum coated aluminum reflector and special shape maximize lumen output
3. Heat resistance and gas tight silicone rubber seal ensures high IP rating
4. Tempered glass lens for shock resistance
5. Optional photocell to maximize energy saving
6. Optional dimming function available upon request
7. IP Class: IP65

### Specifications

Model	Lamp	Power (W)	Voltage (V)	Power factor (COS φ)	Environ Temp (C)	CCT (K)	Replace HPS lamp
GL-ZD03-W40	GL-WJY40H850W41	40	120-277	≥ 0.96	-20~ +40C	5000K	70W
GL-ZD03-W60	GL-WJY60H850W41	60	120-277	≥ 0.96	-20~ +40C	5000K	100W
GL-ZD03-W80	GL-WJY80H850W	80	120-277	≥ 0.96	-20~ +40C	5000K	150W
GL-ZD03-W100	GL-WJY100H850W	100	120-277	≥ 0.96	-20~ +40C	5000K	150W

Note: The products with CCT 2700~ 6500K and another input voltage are available. Products for operating at special surrounding temperature (-40c - 0 or -40 - +50C) are available upon request.

GreenLight Induction  
Questions and Comments:  
Support@greenlightinduction.com  
OFFICE 949-429-3435

