

HIGH EFFICIENCY SHOE BOX LIGHTING FIXTURE
GL-ZQ01B



Fixture sizes (Unit: mm)




Optional Mounting Mode



Slip flitter



U-Bracket

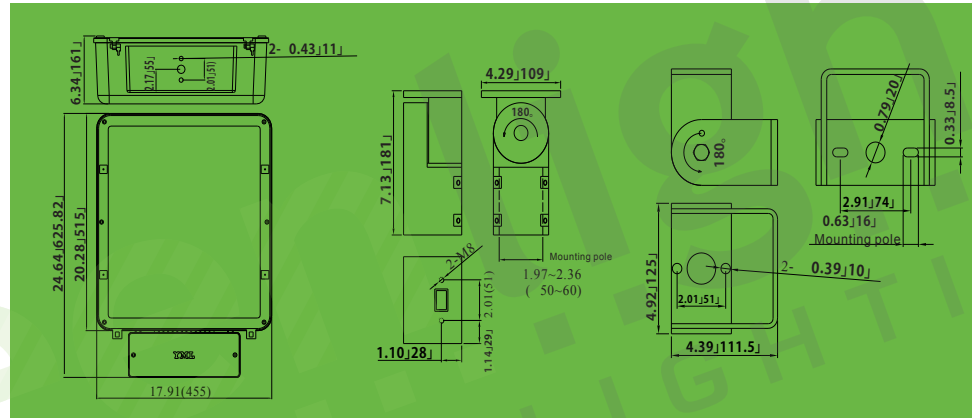

Features



1. High-pressure die cast aluminum housing with powder coated finish for corrosion resistance
2. High reflection efficiency reflector imported from Germany Alanod aluminum company
3. Separated lamp housing and ballast for longer lifespan
4. Tempered glass lens for shock resistance and durable use
5. Heat-resistance and gas tight rubber seal ensures high IP rating
6. Different installation ways for chose
7. IP Class: IP65

Specifications

Model	Lamp	Power (W)	Voltage (V)	Power factor (COS φ)	Environ Temp (C)	CCT (K)	Replace HPS lamp
GL-ZQ01B-W80	GL-WJY80J850W	80	120-277	≥ 0.96	-20~ +40C	5000K	70W
GL-ZQ01B-W100	GL-WJY100J850W	100	120-277	≥ 0.96	-20~ +40C	5000K	100W
GL-ZQ01B-W120	GL-WJY120J850W	120	120-277	≥ 0.96	-20~ +40C	5000K	150W
GL-ZQ01B-W150	GL-WJY150J850W	150	120-277	≥ 0.96	-20~ +40C	5000K	150W

Note: The products with CCT 2700~ 6500K and another input voltage are available. Products for operating at special surrounding temperature [-40c - 0 or -40 - +50C] are available upon request.

Distribution curve flux

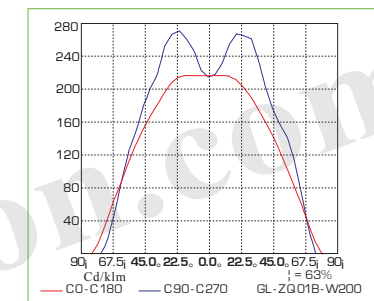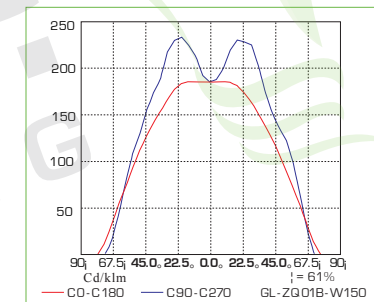

GreenLight Induction
Questions and Comments:
Support@greenlightinduction.com
OFFICE 949-429-3435

