


INDUCTION WALL PACK - Flood Type Fixtures

100,000 Hrs

The Next Generation of Lighting

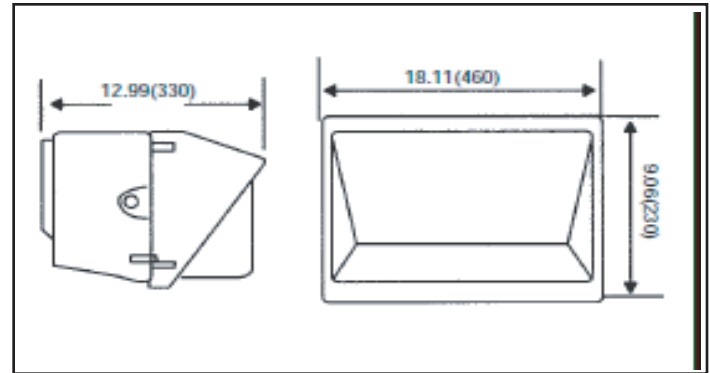

Specification:

- Ballast Type	Electronic
- Start Method	InstantON
- Hot Re-start	InstantON
- Universal Input Line Voltage	120-277 VAC
- Input Line Frequency	50/60 Hz
- Lamp Life	100,000 Hrs.
- Lumen Maintenance @70,000Hrs	>70%
- Color Temperature	5000 K
- Color Rendering Index (CRI)	83
- Minimum Starting Temperature	-20° F
- Maximum Operating Temperature	160 F
- Lamp Operating Frequency	250 kHz
- Power Factor	>0.98
- Total Harmonic Distortion	< 10%
- Inrush Current Peak	<10 Amp
- UL/cUL Listed	Yes
- FCC Compliance	Part 18, Subp. C



Applications, Features, and Benefits

- Flood type wall pack
- Heat and impact resistant tempered glass lens
- Aluminum cast housing with electrocoat gray or brown paint
- Ballast made of long life components
- InstantON flicker-free Cold Start and Hot Re-Start
- Correlated Color Temperature of 5000 K for greater visibility
- High Power Factor, Low THD Replaceable Ballast
- Concealed continuous gasket seals against harmful dust, dirt, moisture and insects
- UL Listed for Wet Locations
- Advanced phosphors for high Lumen Maintenance and high lumen output
- Aluminum Anodized reflector for superior long term performance
- Up to 15 years Maintenance free operation
- Ideal replacements for HPS and HID floodlights up to 250 Watts

Product Information

Item No.	Description	Watts	Initial Lumens	Line Voltage Supply	Line Current	Total Harmonic Distortion (THD)	Power Factor	Packaging Dimensions		
								Width	Length	Height
21080FLD-***	WALL PACK-80W	80	5,900	120-277 VAC	0.80-0.32 Amp	<10%	0.98	14 in. 355 mm	20 in. 508 mm	10 in. 255 mm
21100FLD-***	WALL PACK-100W	100	7,500	120-277 VAC	0.92-0.39 Amp	<10%	0.98	14 in. 355 mm	20 in. 508 mm	10 in. 255 mm
21150FLD-***	WALL PACK-150W	150	11,250	120-277 VAC	1.30-0.56 Amp	<10%	0.98	14 in. 355 mm	20 in. 508 mm	10 in. 255 mm

Voltage: [***] UNV = 120V-277V [Higher 347V or 480V also available]

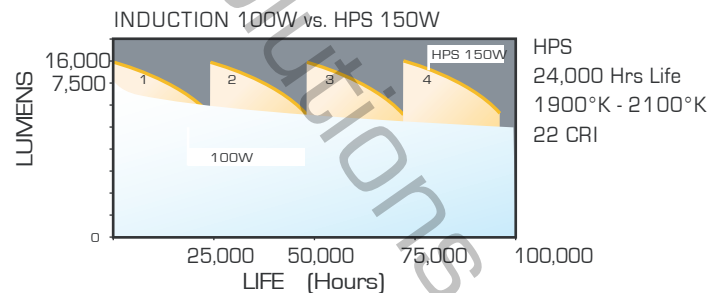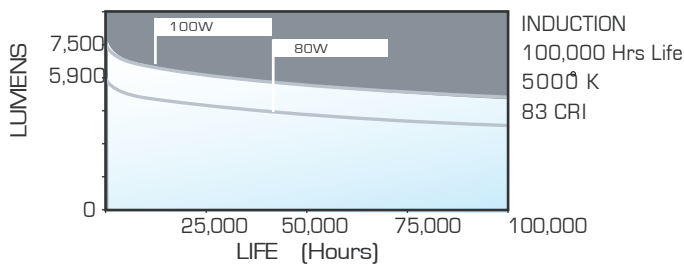

Green Light Induction Lighting
Questions and Comments:
support@greenlightinduction.com
Toll-Free: 1-877-357-2433



Green Light Induction TM
Saving you money while saving the Earth
www.greenlightinduction.com

