

# 32 " INDUCTION - Cobra Street Light Fixtures

100,000 Hrs Life

The Next Generation of Lighting



SIZE: 32"L X 12"W X 8"H

## Specification:

- Ballast Type	Electronic
- Start Method	InstantON
- Hot Re-start	InstantON
- Universal Input Line Voltage	120-277 VAC
- Input Line Frequency	50/60 Hz
- Lamp Life	100,000 Hrs.
- Lumen Maintenance @60,000Hrs	>70%
- Color Temperature	5000 K
- Color Rendering Index (CRI)	83
- Minimum Starting Temperature	-20° F
- Maximum Operating Temperature	160° F
- Lamp Operating Frequency	250 kHz
- Power Factor	>0.98
- Total Harmonic Distortion	< 10%
- Inrush Current Peak	<10 Amp
- UL/cUL Listed	Yes
- FCC Compliance	Part 18, Subp. C



## Applications, Features, and Benefits

- Low Light Pollution (LLP) design - FULL CUT-OFF
- Heat and impact resistant tempered glass lens
- Die-cast aluminum housing with electrocoat gray or brown paint
- Ballast made with long life components
- InstantON flicker-free Cold Start and Hot Re-Start
- Correlated Color Temperature of 5000 K for greater visibility
- High Power Factor, Low THD Replaceable Ballast
- Concealed continuous gasket seals against harmful dust, dirt, moisture and insects
- External stainless steel latch
- UL Listed for Wet Locations
- Advanced phosphors for high Lumen Maintenance and high lumen output
- Aluminum Anodized reflectors for superior long term performance
- Up to 15 years Maintenance free operation
- 85 Watt, 100Watt, 150Watt and 200Watt models available in the same housing
- Light Sensor Detector (LD) for Dusk-to-Dawn ON/OFF control - optional

## Product Information

Item No.	Description	Watts	Initial Lumens	Line Voltage Supply	Line Current	Total Harmonic Distortion (THD)	Power Factor	Packaging Dimensions		
								Width	Length	Height
81100-***	32" GLC-100LLP Cobra	100	8,000	100-300 VAC	0.74-0.32 Amp	<10%	0.98	14.2 in. 360 mm	34.0 in. 860 mm	10.6 in. 270 mm
81120-***	32" GLC-120LLP Cobra	120	9,600	100-300 VAC	0.87-0.38 Amp	<10%	0.98	14.2 in. 360 mm	34.0 in. 860 mm	10.6 in. 270 mm
81150-***	32" GLC-150LLP Cobra	150	11,250	100-300 VAC	1.31-0.57 Amp	<10%	0.98	14.2 in. 360 mm	34.0 in. 860 mm	10.6 in. 270 mm
81200-***	32" GLC-200LLP Cobra	200	15,000	100-300 VAC	1.67-0.73 Amp	<10%	0.98	14.2 in. 360 mm	34.0 in. 860 mm	10.6 in. 270 mm

Voltage: [\*\*\*] = UNV 120V-277V [ Higher 347V or 480V also available ]

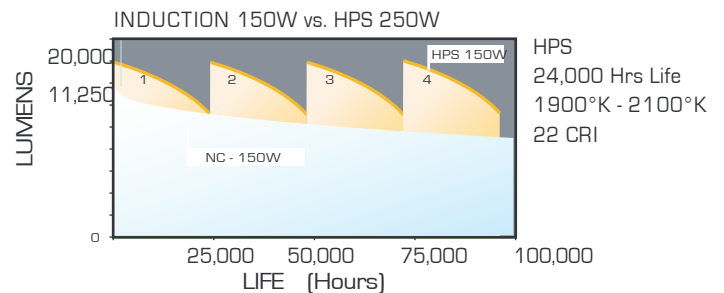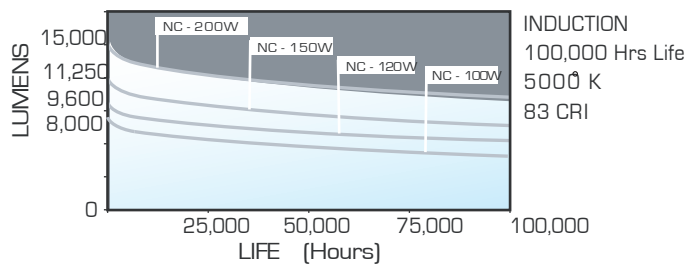

Questions and Comments:  
[support@greenlightinduction.com](mailto:support@greenlightinduction.com)  
 Toll-Free: 1-877-357-2433



Green Light Induction  
 Saving you money while saving the Earth  
[www.greenlightinduction.com](http://www.greenlightinduction.com)



© 2008-2010  
 Green Energy Management Solutions, LLC